


EMVA 1288 Summary Sheet

This datasheet describes the specification according to the standard 1288 for Characterization and Presentation of Specification Data for Image Sensors and Cameras of the European Machine Vision Association (EMVA)(see www.standard1288.org). The measurements were performed with an AEON ACC3 RGB Release 3, 20.01.2104, SN 0005() . The performance parameters and estimated accuracy of the measurements are described in the technical report for the instrument, its calibration in the corresponding calibration report.



Vendor	MATRIX VISION
Model	mvBlueFOX3-1012dC
Serial number	F0500058
Sensor diagonal	6.00 mm
Lens category	C-Mount
Resolution	1280 × 960, 10 bit
Pixel size	3.75 μm × 3.75 μm
Sensor type	CMOS
Shutter type	rolling
Overlap capabilities	
Maximum frame rate	40.6 Hz
Interface type	USB3 Vision

Type of data presented	Single
Operation point 1, (page 5)	
Wavelength centroid	467.3 nm
Wavelength FWHM	20.5 nm
Gain, offset	Gain = 0dB, Offset = 0.45
Operation point 2, (page 17)	
Wavelength centroid	534.2 nm
Wavelength FWHM	30.9 nm
Gain, offset	Gain = 0dB, Offset = 0.45
Operation point 3, (page 29)	
Wavelength centroid	629.5 nm
Wavelength FWHM	13.1 nm
Gain, offset	Gain = 0dB, Offset = 0.45
Optional data measured	
None	

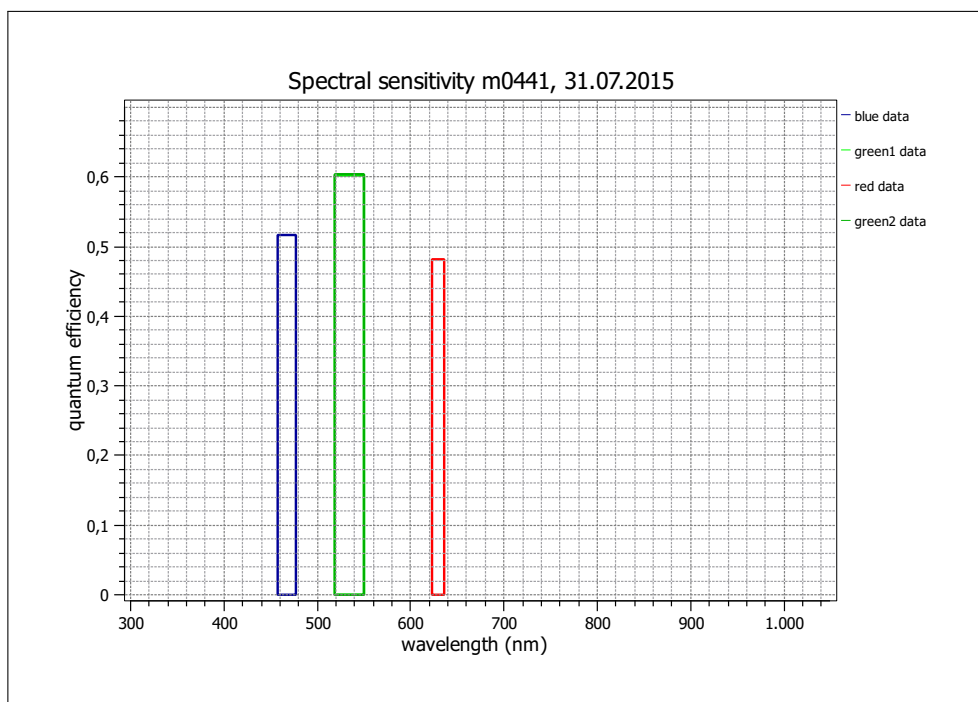

EMVA 1288 Summary Sheet for Operating Point 1



Type of data	Single	Gain, offset	Gain = 0dB, Offset = 0.45
Exposure time	8.0 ms	Environmental temperature	26.4°C
Frame rate	0.0 Hz	Camera temperature	35.3°C
Data transfer mode	BayerGR10	Wavelength, centr., FWHM	467 nm, 20.5 nm

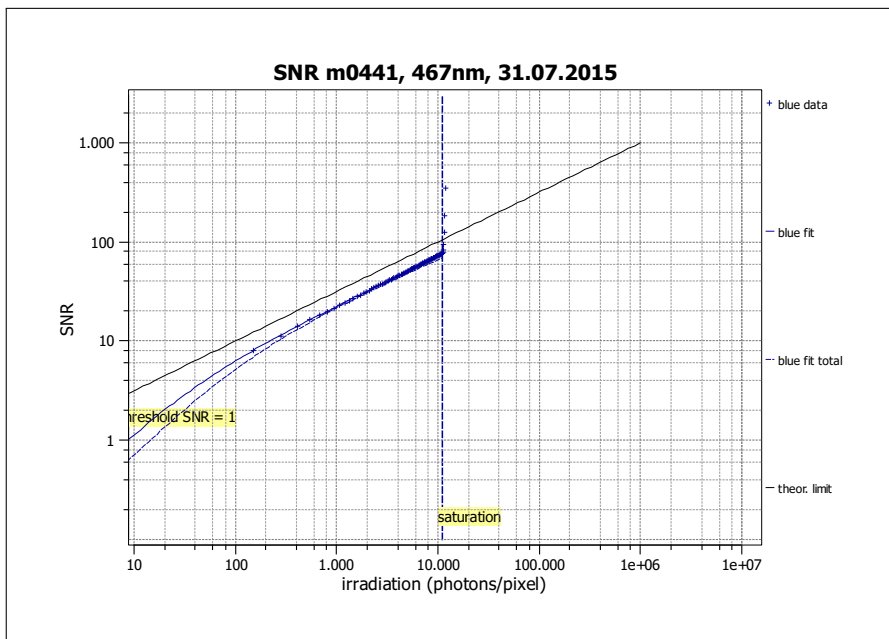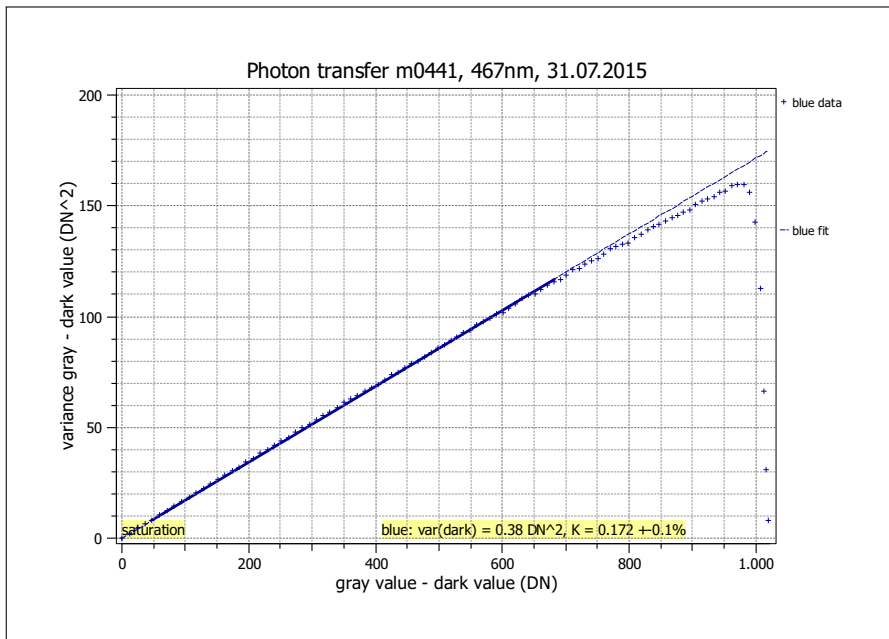

Quantum efficiency	
η	0.516
Gain	
K (DN/e)	0.172
$1/K$ (e/DN)	5.830
Dark noise & DSNU	
σ_d (DN)	0.62
σ_0 (e)	3.2
DSNU ₁₂₈₈ (DN)	0.98
DSNU ₁₂₈₈ (e)	5.69
Signal-to-noise ratio & PRNU	
SNR _{max}	76
SNR _{max} (dB)	37.6
SNR _{max} (bits)	6.2
$1/\text{SNR}_{\text{max}}$ (%)	1.32
PRNU ₁₂₈₈ (%)	0.606
Nonlinearity	
LE (%)	0.32
Sensitivity & saturation	
$\mu_{p,\text{min}}$ (p)	8.0
$\mu_{e,\text{min}}$ (e)	4.1
$\mu_{p,\text{sat}}$ (p)	11047
$\mu_{e,\text{sat}}$ (e)	5702
Dynamic range	
DR	1380
DR (dB)	62.8
DR (bit)	10.4
Dark current	
$\mu_{c,\text{mean}}$ (DN/s)	2.78
$\mu_{c,\text{mean}}$ (e/s)	16.20
$\mu_{c,\text{var}}$ (e/s)	149.80

EMVA 1288 Summary Sheet for Operating Point 2



Type of data	Single	Gain, offset	Gain = 0dB, Offset = 0.45
Exposure time	8.0 ms	Environmental temperature	26.4°C
Frame rate	0.0 Hz	Camera temperature	35.3°C
Data transfer mode	BayerGR10	Wavelength, centr., FWHM	534 nm, 30.9 nm

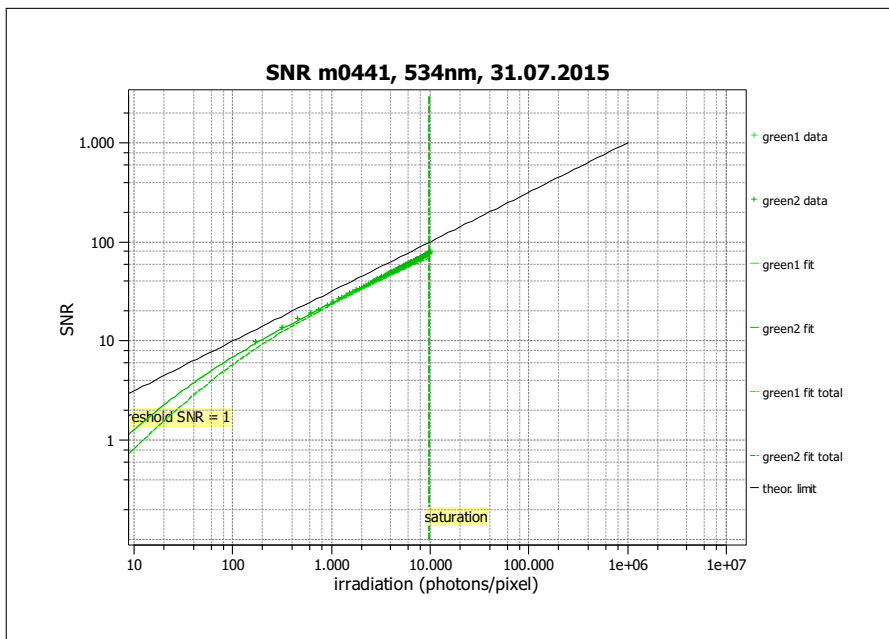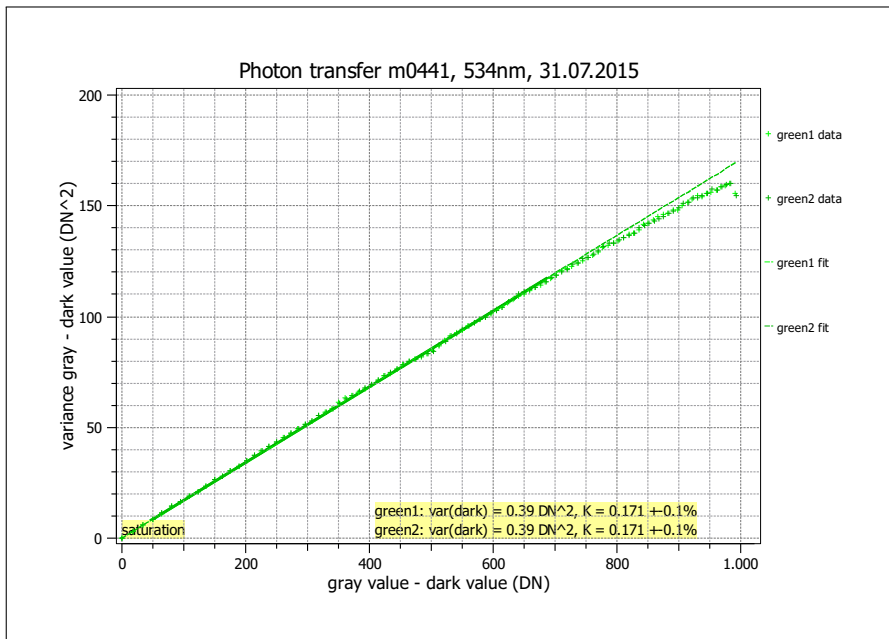

Quantum efficiency	
η	0.603
Gain	
K (DN/e)	0.171
$1/K$ (e/DN)	5.852
Dark noise & DSNU	
σ_d (DN)	0.62
σ_0 (e)	3.2
DSNU ₁₂₈₈ (DN)	0.96
DSNU ₁₂₈₈ (e)	5.61
Signal-to-noise ratio & PRNU	
SNR _{max}	77
SNR _{max} (dB)	37.7
SNR _{max} (bits)	6.3
$1/\text{SNR}_{\text{max}}$ (%)	1.30
PRNU ₁₂₈₈ (%)	0.661
Nonlinearity	
LE (%)	0.82
Sensitivity & saturation	
$\mu_{p,\text{min}}$ (p)	6.9
$\mu_{e,\text{min}}$ (e)	4.2
$\mu_{p,\text{sat}}$ (p)	9847
$\mu_{e,\text{sat}}$ (e)	5933
Dynamic range	
DR	1420
DR (dB)	63.0
DR (bit)	10.5
Dark current	
$\mu_{c,\text{mean}}$ (DN/s)	3.18
$\mu_{c,\text{mean}}$ (e/s)	18.61
$\mu_{c,\text{var}}$ (e/s)	153.95

EMVA 1288 Summary Sheet for Operating Point 3

Type of data	Single	Gain, offset	Gain = 0dB, Offset = 0.45
Exposure time	8.0 ms	Environmental temperature	26.4°C
Frame rate	0.0 Hz	Camera temperature	35.3°C
Data transfer mode	BayerGR10	Wavelength, centr., FWHM	630 nm, 13.1 nm

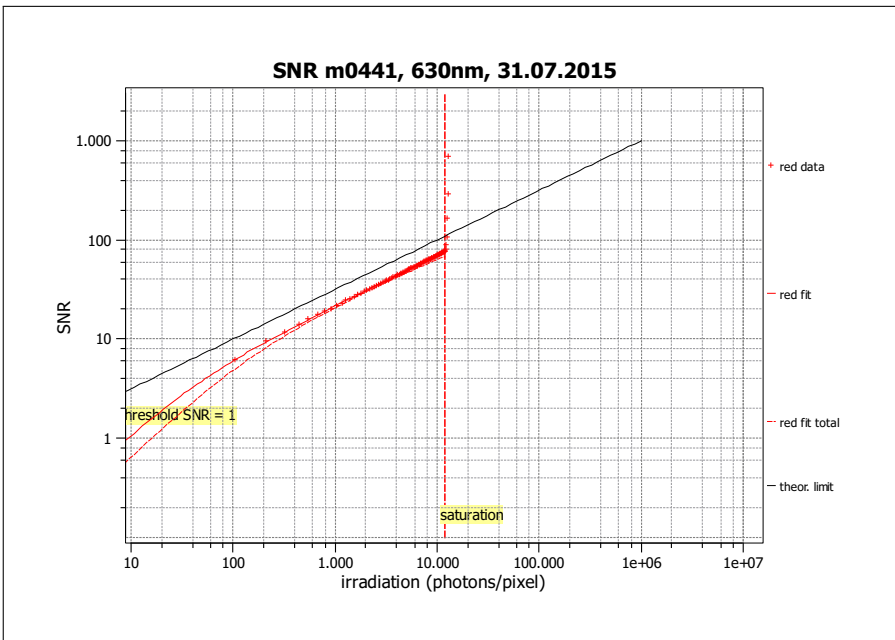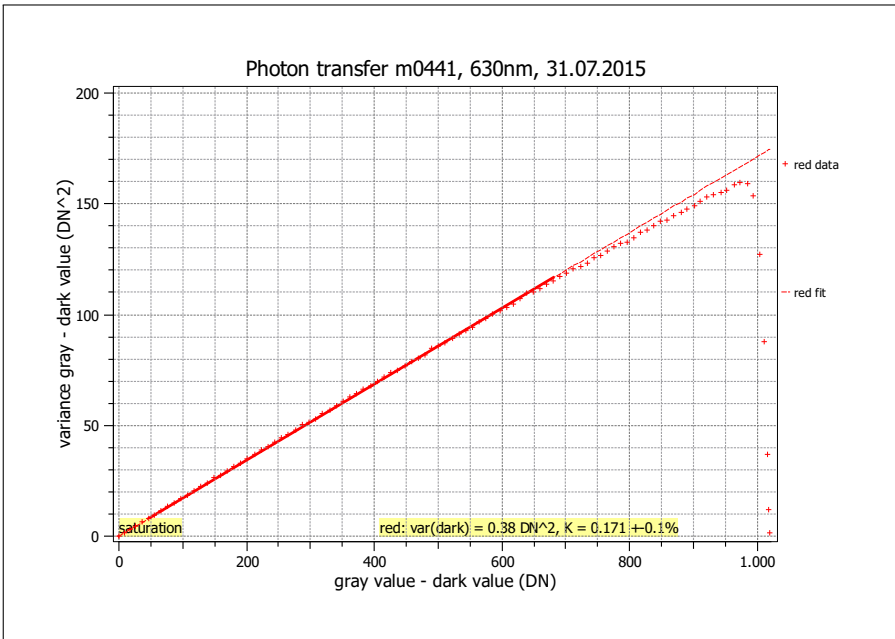

Quantum efficiency	
η	0.482
Gain	
K (DN/e)	0.171
$1/K$ (e/DN)	5.837
Dark noise & DSNU	
σ_d (DN)	0.62
σ_0 (e)	3.2
DSNU ₁₂₈₈ (DN)	1.02
DSNU ₁₂₈₈ (e)	5.95
Signal-to-noise ratio & PRNU	
SNR _{max}	76
SNR _{max} (dB)	37.6
SNR _{max} (bits)	6.2
$1/\text{SNR}_{\text{max}}$ (%)	1.32
PRNU ₁₂₈₈ (%)	0.631
Nonlinearity	
LE (%)	0.37
Sensitivity & saturation	
$\mu_{p,\text{min}}$ (p)	8.6
$\mu_{e,\text{min}}$ (e)	4.2
$\mu_{p,\text{sat}}$ (p)	11922
$\mu_{e,\text{sat}}$ (e)	5748
Dynamic range	
DR	1383
DR (dB)	62.8
DR (bit)	10.4
Dark current	
$\mu_{c,\text{mean}}$ (DN/s)	-1.45
$\mu_{c,\text{mean}}$ (e/s)	-8.46
$\mu_{c,\text{var}}$ (e/s)	127.35