


EMVA 1288 Data Sheet m0844

This datasheet describes the specification according to the standard 1288 release 3.1 for "Characterization and Presentation of Specification Data for Image Sensors and Cameras" issued on December 30, 2016 by the European Machine Vision Association (EMVA), published at www.standard1288.org and the *zenodo EMVA 1288 community* with proprietary extensions from AEON. The measurements were performed with the AEON ACC3 Release 6, 26.11.2016, SN 0005(MatrixVision.

Measurements performed by T.Renner, Matrix Vision GmbH


Vendor	MATRIX VI-SION	Type of data presented	Single
Model	mvBlueFOX3-2204G	Operation point 1 (page 3)	
Serial number	FF005585	Wavelength centroid	535.0 nm
Sensor diagonal	17.48 mm	Wavelength FWHM	31.0 nm
Lens category	C-Mount	Gain, black-level	0dB, 0.1
Resolution	4512 × 4512, 12 bit	Optional data measured	
Pixel size (h×v)	2.74 μm × 2.74 μm	None	
Sensor	IMX541		
Sensor type	CMOS		
Shutter type	Global		
Overlap cap.	Overlapping		
Max. frame rate	9.3 Hz		
Interface type	USB3 Vision		

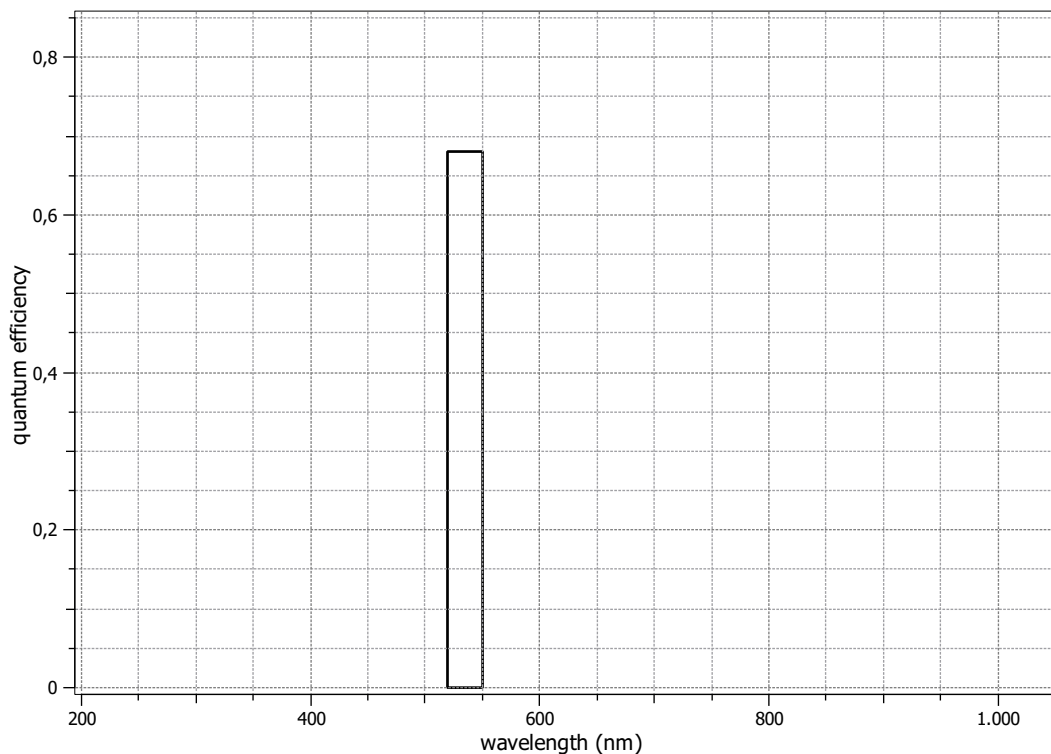


Summary Sheet for Operation Point 1 at a Wavelength of 535 nm

Type of data	Single	Gain, black-level	0dB, 0.1
Exposure control	By exposure time	Environmental temperature	22.4°C
Exposure time	17.00 ms	Camera body temperature	32.2°C
Frame rate	9.3 Hz	Internal temperature(s)	—
Data transfer mode	Mono12	Wavelength, centr., FWHM	535 nm, 31.0 nm

Photon Transfer

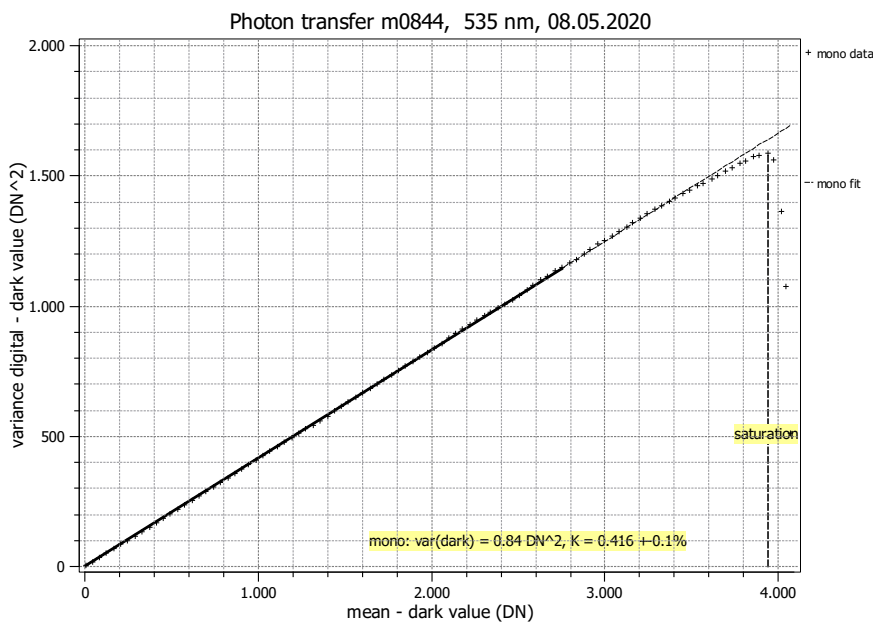

Signal-to-Noise Ratio

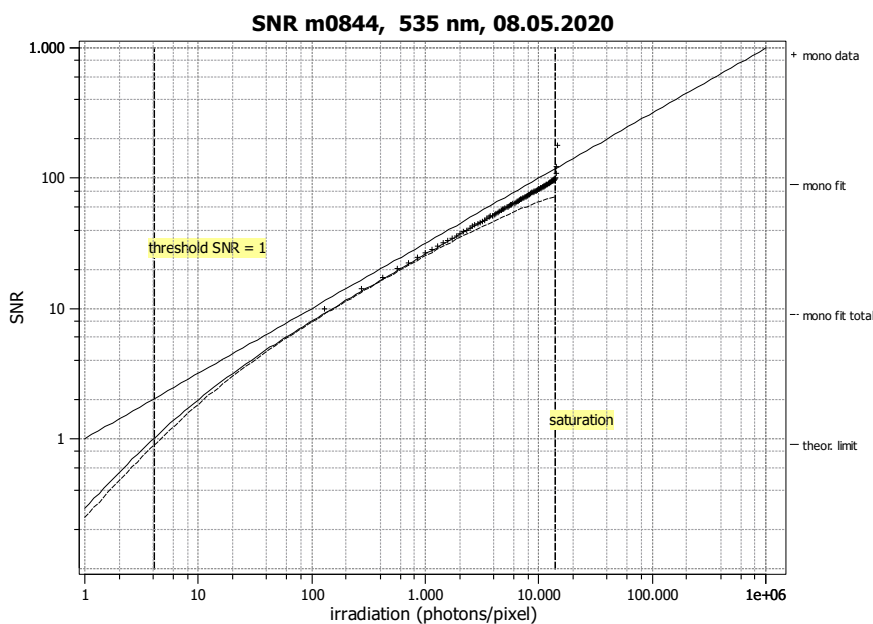

Quantum efficiency	
η	68.0%
Overall system gain	
K	0.416 DN/e ⁻
$1/K$	2.402 e ⁻ /DN
Temporal dark noise	
σ_d	2.09 e ⁻
$\sigma_{y.dark}$	0.92 DN
Signal-to-noise ratio	
SNR _{max}	97
	39.8 dB
	6.6 bit
$1/\text{SNR}_{max}$	1.03 %
Absolute sensitivity threshold	
$\mu_{p.min}$	4.06 p
$\mu_{p.min.area}$	0.540 p/μm ²
$\mu_{e.min}$	2.76 e ⁻
$\mu_{e.min.area}$	0.368 e ⁻ /μm ²
Saturation capacity	
$\mu_{p.sat}$	13972 p
$\mu_{p.sat.area}$	1861 p/μm ²
$\mu_{e.sat}$	9506 e ⁻
$\mu_{e.sat.area}$	1266 e ⁻ /μm ²
Dynamic range	
DR	3445
	70.7 dB
	11.8 bit
Spatial nonuniformities	
DSNU ₁₂₈₈	1.44 e ⁻
	0.60 DN
PRNU ₁₂₈₈	0.93 %
Linearity error	
LE _{min}	-0.45%
LE _{max}	0.58%
Dark current	
$\mu_{c.mean}$	8914 ± 4656 e ⁻ /s
	3711.8 DN/s
$\mu_{c.var}$	-20 ± 10 e ⁻ /s
T_d	— °C